


ROPE STRETCHER

ROPE STRETCHER W-RS



- ✓ Realized in a compact and reliable assembly.
- ✓ Wide range of rope length compensation.
- ✓ The electro welded steel structure offers high resistance, eliminates deformations and provides perfect trolley sliding.
- Pulleys in painted cast iron with bearings.
- Moving trolley supporting the pulley is driven by pneumatic cylinders.
- Double acting cylinders provide rope stretch control and stabilizing counter pressure.
- "TAIL THREADING TENSION" and "SLOW SPEED OPERATION" switch.
- Models with different strokes, for double or single rope.
- Vertical or horizontal installation.
- Accessories
 - Maximum rope stretch detecting device.

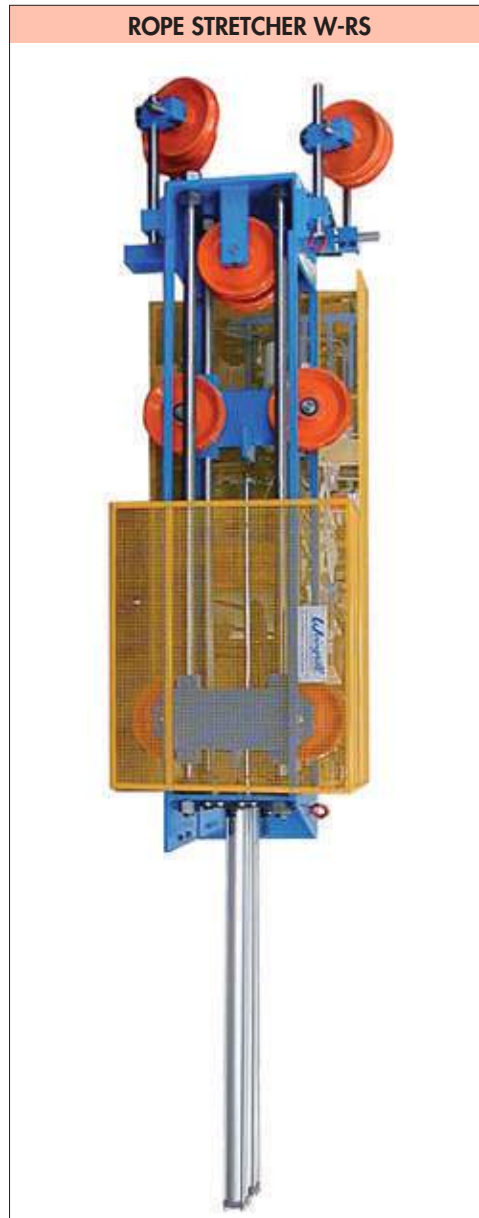

DRY END TAIL BREAKER

DRY END TAIL BREAKER W-SHARK

- ✓ Tail cutting and threading system.
 - ✓ Fully automated cutting and threading sequence.
 - ✓ Safety protections and electric block to prevent access to cutting blades during operation.
 - Tail break with teathed blade.
 - Tail thread with adjustable air jets.
 - Separated pushbutton box for tail breaker operation.
 - Dedicated control box with based on PLC with display and keyboard which allow setting sequences and timing directly in the field.
 - Power and air cut off when safety barriers are open.
- Complete system, pre-tested at Weingrill facilities, ready for installation.

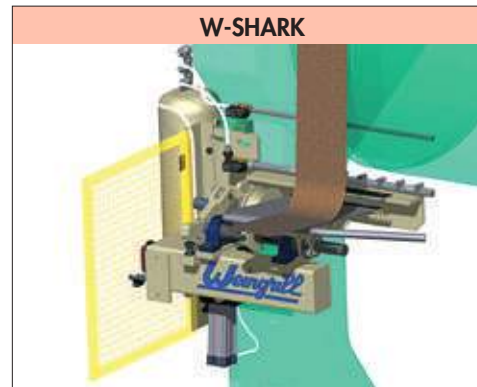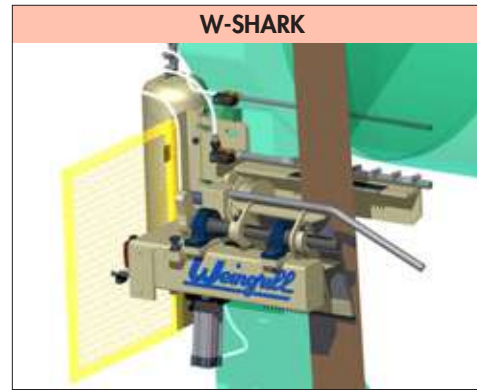

INSTALLATION OF W-SHARK

